


E.MIX Stopping Compound

Joint filler or finish for board jointing and cornices

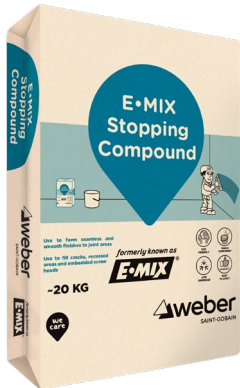

E.MIX Stopping Compound is a specially formulated joint filler and finish for board jointing and cornice applications. All phases of gypsum plasterboard jointing can be performed with it. Excellent workability and superior build quality are ensured by the consistent setting time.

PRODUCT BENEFITS



SINGLE COMPONENT



ECO FRIENDLY



EASY APPLICATION

USES

E.MIX Stopping Compound is used to flush joints and touch up plasterboards for a smooth and fine finish. It is ideal as a bonding and fixing compound for cornices and molding coves on various kinds of ceiling surfaces. When needed, it can also be used to skim interior walls.

TECHNICAL DATA & PHYSICAL PROPERTIES

Colour	White
Appearance	Powder
Binder	Gypsum
Filler	Calcium Carbonate Powder
Flammability	Non-flammable
Solubility (Water)	Soluble
Setting Time	25 mins
Water Demand	Approx. 50 % or 10 litres/20 kg bag

Specifications are subject to change without notification. Results shown are typical but reflect laboratory test procedures conducted in laboratory conditions. Actual field performance will depend on installation methods and site conditions.

PROCEDURE & APPLICATION



Substrate Preparation

All surfaces must be clean, sound, and free from any laitance, oil, grease, and any contaminants.



Mixing

Add E.MIX Stopping Compound to the required amount of clean water. Allow the mixture to stand for approximately 2 - 3 minutes before mixing. Mix thoroughly until the mixture is homogeneous and reaches a creamy paste consistency. Do not mix with residue from older mixes. Do not overmix as this can lead to air bubbles.



Application

E.MIX Stopping Compound can be applied with a steel trowel or broad knife. For thicker applications with several layers, the layer underneath must be hardened and dried before applying the subsequent layer. When used to skim interior walls, smoothen the surface by using a suitable trowel for thickness within 1 - 3 mm.

E.MIX Stopping Compound

Joint filler or finish for board jointing and cornices

CONSUMPTION

Approx. 34m² per 20 kg bag.

PRECAUTION

Do not apply in areas subject to continuously damp or humid conditions. E.MIX Stopping Compound should not be exposed to temperatures above 50°C for prolonged periods.

STORAGE & PACKING

E.MIX Stopping Compound is available in 20 kg bags.
Shelf life of 9 months if unopened and kept in sheltered and dry conditions.

HEALTH & SAFETY

E.MIX Stopping Compound may irritate eyes and skin. In case of contact with eyes, rinse immediately with plenty of water, and seek medical assistance. After contact with skin, wash immediately with plenty of soap and water. Please keep out of reach of children.

*Note: Because it is not possible to give specific instructions for the various site conditions or to control the applications, the information on this Technical Data Sheet is for general guidance only. Saint-Gobain (Singapore) Pte Ltd reserves the rights to amend the contents of the data sheet at its sole discretion. (Nov '22)

bizSAFE₃



SAINT-GOBAIN (SINGAPORE) PTE LTD - 199804527M

2 Venture Drive, #13-18 Vision Exchange, Singapore 608526

(65) 63308288 (65) 63308289 EIS.info@Saint-Gobain.com www.saint-gobain.sg

SAINT-GOBAIN